

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
9 January 2003 (09.01.2003)


PCT

(10) International Publication Number
WO 03/003506 A1

- (51) International Patent Classification⁷: **H01Q 1/24**, (74) Agent: **OULUN PATENTTITOIMISTO BERGGREN OY AB**; Lentokatu 2, FIN-90460 Oulunsalo (FI).
H04M 1/02
- (21) International Application Number: **PCT/FI02/00566** (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.
- (22) International Filing Date: 26 June 2002 (26.06.2002)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: 20011400 29 June 2001 (29.06.2001) FI (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- (71) Applicant (*for all designated States except US*): **FIL-TRONIC LK OY** [FI/FI]; Takatie 6, FIN-90440 Kempele (FI).
- (72) Inventors; and
- (75) Inventors/Applicants (*for US only*): **ANNAMAA, Petteri** [FI/FI]; Vesakuja 5, FIN-90460 Oulunsalo (FI). **MIKKOLA, Jyrki** [FI/FI]; Haukkakaarto 17 A 5, FIN-90440 Kempele (FI).
- Published:
— with international search report
— with amended claims

[Continued on next page]

(54) Title: ARRANGEMENT FOR INTEGRATING A RADIO PHONE STRUCTURE

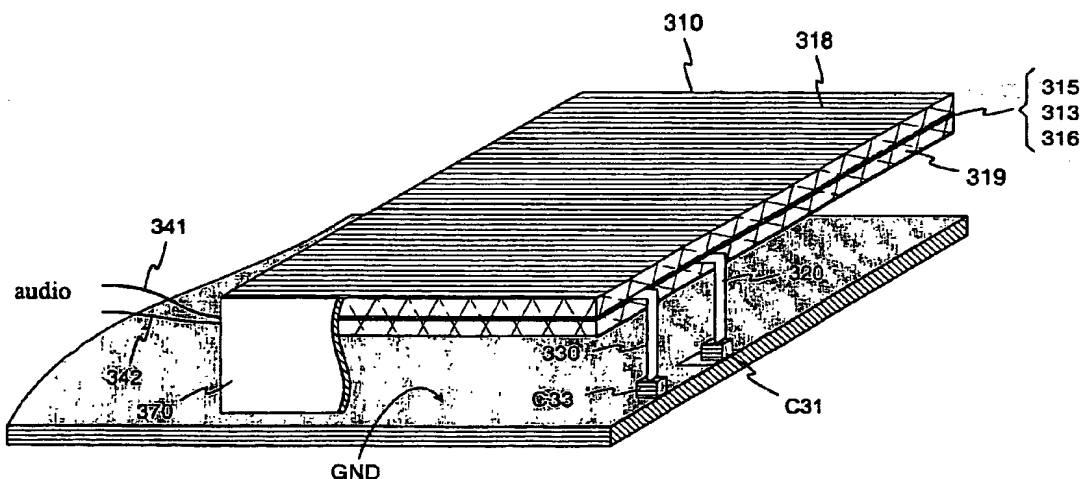

(57) Abstract: The invention relates to an arrangement designed for radio phones for integrating a mechanical structure of the antenna head of a the phone. The mechanical structures of an antenna and a speaker of the radio phone are integrated so that a given planar component radiates both radio waves and sound waves. The radiator component (310) comprises a layer (315, 316) of a material, a shape of which can be controlled by means of a voltage. The sound waves, i.e. the fluctuation of the air pressure are thus generated by causing the thickness or position of the layer to fluctuate according to the control voltage. In an arrangement according to the invention, the antenna head of the radio phone becomes more compact than in the prior art, and it takes up less space because the antenna and the speaker utilize same structural elements.

BEST AVAILABLE COPY

WO 03/003506 A1



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Arrangement for integrating a radio phone structure

The invention relates to an arrangement, designed especially for mobile phones, for integrating the mechanical structure of the antenna head of a mobile phone.

As mobile phones are becoming smaller, all arrangements that help reduce their size
5 are recommendable. As regards antennas, an advantageous solution is a PIFA type
(planar inverted F-antenna) structure. It is effective with respect to its size, and it
does not create a protruding part in the phone. In an ordinary mobile phone
structure, there is provided a speaker at the same end with the antenna, according to
figure 1. Figure shows a mobile phone MS including a circuit board 105, the top
10 surface whereof is coated with a conductive layer. The conductive layer forms,
among others, the ground plane of the antenna. A PIFA type antenna comprises a
radiating plane 101 that is somewhat higher than the ground plane. Beside the
radiating plane, there is a speaker capsule 102, from which the sound is led to
apertures provided in the mobile phone shell.

15 The object of the invention is to realize the mechanical structure of that end of a
radio phone where the antenna is installed in a novel and more advantageous way.
The antenna structure according to the invention is characterized by what is set forth
in the independent claim 1. Preferred embodiments of the invention are presented in
the dependent claims.

20 The basic idea of the invention is as follows: in a radio phone, the antenna and the
speaker/loudspeaker are integrated in their mechanical structure, so that a given
planar component radiates both radio and sound waves. The radiator component
contains a layer of material, the shape of which can be controlled by means of a
voltage. Sound waves, or the air pressure fluctuation, is then generated by causing
25 the layer thickness or position to fluctuate according to the control voltage.
Advantageously the antenna represents the PIFA type.

An advantage of the invention is that in an arrangement according to it, the antenna
head of a radio phone becomes more compact than in the prior art, because the
antenna and the speaker use same structural parts. Another advantage of the
30 invention, for the same reason, is that the total space required by the antenna and the
speaker is reduced.

The invention is described in more detail below with reference to the appended
drawings, where

- figure 1 shows an example of a prior art arrangement at the antenna head of a radio phone,
- figure 2a shows an example of an arrangement according to the invention at the antenna head of a radio phone,
- 5 figure 2b is a circuit diagram showing a feed arrangement of the structure shown in figure 2a,
- figure 3a shows another example of an arrangement according to the invention at the antenna head of a radio phone,
- figure 3b shows a feed arrangement of the structure shown in figure 3a and a
10 structure of the radiator component,
- figure 4 shows a third example of an arrangement according to the invention at the antenna head of a radio phone, and
- figure 5 shows an example of a radio phone provided with an arrangement according to the invention.
- 15 Figure 1 was already dealt with in the description of the prior art.
- Figure 2a shows an example of an arrangement according to the invention at the antenna head of a radio phone. The arrangement comprises a conductive ground plane GND and a radiator component 210 that is parallel with the ground plane. In this example, the radiator component is formed of an electret layer 215, the top
20 surface whereof is coated with a first conductor plane 211 and the bottom surface whereof is coated with a second conductor plane 212. The radiator component 210 is supported against the ground plane (or against the circuit board underneath the ground plane) with insulating elements, such as an element 271.
- In this description and in the claims, the prefix "top" refers to the opposite surface
25 or side with respect to the ground plane, and the prefix "bottom" refers to the surface of side facing the ground plane. Respectively, a vertical direction means a direction that is perpendicular to the ground plane.
- To the first conductor plane 211 there is connected a first feed conductor 221 and to the second conductor plane 212 at a same vertical line as the first feed conductor,
30 there is connected a second feed conductor 222 of the antenna. Respectively, in another spot of the radiator component, in the first conductor plane there is

connected a first short-circuit conductor 231 of the antenna, and in the second conductor plane 212 at a same vertical line as the first short-circuit conductor, there is connected a second short-circuit conductor 232 of the antenna. The second short-circuit conductor is connected to ground plane via a condensator C24. In a similar way, also the first short-circuit conductor and both the first and second feed conductors have a serial condensator. The feed conductors are connected, via the serial condensators, to the antenna port of a radio transmitter. The described structure serves as a PIFA type antenna, where instead of one radiating plane, there is a dual plane formed of a first and a second conductor plane. In the example of figure 2a, the first conductor plane 211 includes a slot that divides it, viewed from the feed point, into two branches of different lengths. The second conductor plane 212 is provided with a similar slot at the same location. Thus the PIFA is a dual-frequency antenna.

The electret layer 215 is for instance electromechanical film EMFi. The thickness of this type of film is reduced owing to the effect of an electric field. An inner static electric field can be generated in the material, which field causes a constriction of a given magnitude in the direction of the film thickness. External electric fields directed to this film cause additional changes. In the structure of figure 2a, these additional changes are provided with an audio signal. In the first conductor plane 211, there is connected, in addition to the aforementioned conductors, a first audio conductor 241, and in the second conductor plane 212 there is connected a second audio conductor 242. Consequently, the strength of the electric field affecting the electret layer can be made to fluctuate according to the audio signal. It is alternately higher and alternately lower than the strength of the inner field of the electret layer. Thus the radiator component 210 causes a fluctuation of pressure in the ambient air, said fluctuation corresponding to the audio signal. Thus the structure serves as a speaker or a loudspeaker.

Figure 2b shows an example of a circuit diagram of the feed arrangement of the structure illustrated in figure 2a. In the figure is seen a terminal amplifier AA of the receiver's audio part, and a terminal amplifier RA of the radio transmitter. The output of the audio amplifier AA is connected to the conductor planes of the radiator component 210 in a balanced way, so that neither of the output conductors, i.e. audio conductors, is connected to ground. The "hot" conductor of the output of the radio-frequency amplifier RA is connected to the conductor planes of the radiator component capacitively via the condensators C21 and C22. Thus both of the conductor planes get a similar feed, but they are galvanically separated from

each other. The galvanic separation is needed because of the audio feed. The drawing does not show other such elements between the amplifier RA and the antenna that are inessential from the point of view of the present invention. At the short circuit points, the conductor planes of the radiator component are connected to
5 ground capacitively via the condensators C23 and C24. Also here the capacitive coupling is due to the galvanic separation of the conductor planes. The capacitances of the condensators C21 – C24 are chosen so that their impedances are very high at audio frequencies, and very low at radio frequencies. The value of the capacitance is for example 1 nF. Thus the condensators C23 and C24 realize a short circuit only at
10 very high frequencies.

The circuit of figure 2b is drawn from the point of view of the audio amplifier. The equivalent circuit of the radiator component depends on frequency. At radio frequencies, for example between the condensators C21 and C23, as well as between condensators C22 and C24, there prevails a given impedance. The whole
15 radiator component represents a given sound radiation resistance at audio frequencies, and a given radio radiation resistance at radio frequencies. The impedances of the output conductors of the audio amplifier AA with respect to ground must at radio frequencies be arranged to be as high as possible in order to prevent the audio amplifier from remarkably affecting the antenna matching.
20 Another possibility is to choose the location of the audio connection of the radiator component and to arrange the impedances of the output conductors of the audio amplifier with respect to ground so that the audio connection of the radiator component replaces the whole short circuit connection of the PIFA.

Figures 3a and 3b show another example of the arrangement according to the
25 invention at the antenna head of a radio phone. The arrangement comprises a conductive ground plane GND and a radiator component 310 that is parallel with the ground plane. The inner structure of the radiator component appears from figure 3b, where it is illustrated as a longitudinal section. As a loudspeaker solution, the structure is known as such for instance from the article "ElectroMechanical Film – a
30 new multipurpose electret material" [Sensors and Actuators 84 (2000), pp. 95-102]. In this example, in the middle of the radiator component 310, there are superimposed a first electret layer 315 and a second electret layer 316, between which layers there is a conductive film 313. In both electret layers, there is formed an inner vertical electric field, so that the directions of these fields are opposite.
35 Above the first electret layer, there is a sound-permeable first support layer 318, made of a porous and flexible material. Respectively, underneath the second electret

layer, there is a sound-permeable second support layer 319, made of a porous and flexible material. The surfaces of both support layers facing the electret layers are designed to be corrugated, so that said surfaces only touch the electret layers at a relatively small area. These corrugated inner surfaces are coated with a conductive material, so that there are created a first conductor plane 311 that is in contact with the first electret layer 315, and a second conductor plane 312 that is in contact with the second electret layer 316. The first and second conductor planes are provided with tiny perforations, so that even these layers are sound-permeable. The antenna feed conductor 320 is connected at a certain point to the first conductor plane 311, and also at the same vertical line to the second conductor plane 312. Respectively, the antenna short circuit wire 330 is connected at a certain point to the first conductor plane 311, and also at the same vertical line to the second conductor plane 312. Thus the structure serves as a PIFA type antenna, where instead of one radiating plane, there is a dual plane formed of the first and second conductor planes.

The first output conductor of the audio amplifier AA, i.e. the first audio conductor 341, is connected to the first and second conductor layer that are galvanically interconnected according to the description above. The second output conductor of the audio amplifier, i.e. the second audio conductor 342, is connected to the conductive film 313. When the output voltage of the audio amplifier is zero, the electret layers 315, 316 are in their middle position. When the output voltage of the audio amplifier deviates from than zero, the corresponding electric field strengthens the electric field of one electret layer and weakens the electric field of the other electret layer. Now the electrostatic force that draws the plane formed by the electret layers towards the first conductor layer 311 is for instance higher than the electrostatic force that draws the plane formed by the electret layers towards the second conductor layer 312. For this reason, said plane moves forward, until a force balance is reached. When the output voltage of the audio amplifier deviates from zero in the opposite direction, also the changes in the forces have opposite signs, and the plane formed by the electret layers moves downwards. Consequently, the motion of the plane 315, 313, 316 conforms to the fluctuations of the output voltage of the audio amplifier.

The radio-frequency amplifier RA is connected to the radiator component capacitively. In between the "hot" conductor of the audio amplifier output and the antenna feed conductor 320, there is a condensator C31, and between the ground plane GND and the antenna short-circuit conductor 330, there is a condensator C33.

The impedances of the condensators are fairly low at radio frequencies, but fairly high at audio frequencies. Their purpose is to separate the amplifiers feeding the radiator component from each other. For the same reason, the impedance of at least the first output conductor 341 of the audio amplifier with respect to ground is relatively high.

In figure 3a, the radiator component 310 is at the edges supported against the plane provided underneath it by means of a dielectric frame 370, only a small part of which is illustrated in the drawing. Owing to the frame 370, there is formed a closed or nearly closed box, which is advantageous for the sound reproduction. Without said box, the radiator component would be shorted acoustically, particularly at low audio frequencies.

The conductor layers 311, 312 radiating electromagnetic energy can be provided with similar double/multiband arrangements as in the example of figure 2a.

Figure 4 shows a third example of an arrangement according to the invention at the antenna head of a radio phone. For the most part, the arrangement is similar to the one shown in figs 3a, 3b. The difference is that the top surface of the radiator component 410 is now coated with a sound-permeable conductor layer 411. This layer is galvanically connected to the antenna input conductor 420 and to the antenna short-circuit conductor 430 at the same vertical lines as the conductor layers inside the radiator component. Thus there is created a radio radiator that can be made better, as regards conductivity, than the conductor layers inside the component. In figure 4, in the conductor layer 411 there is drawn a slot starting from the edge thereof in order to form a double band antenna.

Figure 5 shows a radio phone MS. It is provided with a radiator component 510, which according to the invention forms a substantial part of both the antenna and the loudspeaker.

In the above specification, we have described antenna head structures according to the invention. The invention is not limited just to these. The inventive idea can be applied in many ways within the scope of the independent claim 1.

Claims

1. An arrangement for integrating a mechanical structure of the antenna head of a radio phone, which structure comprises a ground plane, a planar antenna and a speaker, **characterized** in that it comprises a radiator component (210; 310; 410)
5 that is arranged to function both as a radio wave radiator in the planar antenna and as a sound wave radiator in the speaker.
2. An arrangement according to claim 1, having a first and second audio conductor in order to feed said speaker, **characterized** in that said radiator component (210) comprises a planar layer (215) of an electret material, having a
10 static inner electric field, a first conductor plane (211) on its top surface and a second conductor plane (212) on its bottom surface, to the first conductor plane being connected a first antenna feed conductor (221) and a first audio conductor (241), and to the second conductor plane being connected a second antenna feed conductor (222) and a second audio conductor (242), and that the first and second
15 conductor planes are in a radio transmitting situation arranged to get an identical feed through said antenna feed conductors.
3. An arrangement according to claim 1, having a first and second audio conductor in order to supply said speaker, **characterized** in that said radiator component (310) comprises a first (315) and second (316) electret layer, which
20 layers have opposite static inner electric fields, a conductive film (313) between the first and second electret layer, a flexible and sound-permeable first support layer (318) above the first electret layer, a flexible and sound-permeable second support layer (319) underneath the second electret layer, a first conductor layer (311) on the bottom surface of the first support layer and a second conductor layer (312) on the
25 top surface of the second support layer, said first conductor layer being in contact with the first electret layer, and said second conductor layer being in contact with the second electret layer, an antenna feed conductor (320) being galvanically connected to the first and second conductor layer, the first audio conductor (341) being connected to the first and second conductor layer and the second audio
30 conductor (342) being connected to said conductive film (313).
4. An arrangement according to claim 3, **characterized** in that it also comprises a dielectric frame (370) around the radiator component (310) and between the radiator component and ground plane (GND) in order to prevent an acoustic short of the speaker and to support the radiator component.

5. An arrangement according to claim 3 and 4, **characterized** in that it also comprises a radio radiator (411) on the top surface of said radiator component.
6. An arrangement according to any of the preceding claim, **characterized** in that said electret layer is the EMFi type.
- 5 7. An arrangement according to claim 1, **characterized** in that the conductor planes of the radiator component that radiate radio waves are short-circuited at a certain point to the ground plane in order to form a PIFA type antenna.
8. A radio phone (MS) having a planar antenna and a loudspeaker, **characterized** in that it comprises a radiator component (510) that is arranged to
10 function both as a radio wave radiator in the planar antenna and as a sound wave radiator in the speaker.

AMENDED CLAIMS

[Received by the International Bureau on 19 November 2002 (19.11.02)]

1. An arrangement for integrating a mechanical structure of the antenna head of a radio phone, which structure comprises a ground plane, a planar antenna with an antenna feed conductor and a speaker with a first and second audio conductor,
5 **characterized** in that it comprises a radiator component (210; 310; 410) that is arranged to function both as a radio wave radiator in the planar antenna and as a sound wave radiator in the speaker, and said antenna feed conductor (221; 320) and one (241; 341) of said audio conductors are galvanically connected to a same conductor plane (211; 311) in the radiator component.
- 10 2. An arrangement according to claim 1, **characterized** in that said radiator component (210) comprises a planar layer (215) of an electret material having a static inner electric field, a first conductor plane (211) on its top surface and a second conductor plane (212) on its bottom surface, to the first conductor plane being connected a first antenna feed conductor (221) and the first audio conductor
15 (241), and to the second conductor plane being connected a second antenna feed conductor (222) and the second audio conductor (242), and that the first and second conductor planes are in a radio transmitting situation arranged to get an identical feed through said antenna feed conductors.
- 20 3. An arrangement according to claim 1, **characterized** in that said radiator component (310) comprises a first (315) and second (316) electret layer, which layers have opposite static inner electric fields, a conductive film (313) between the first and second electret layer, a flexible and sound-permeable first support layer (318) above the first electret layer, a flexible and sound-permeable second support layer (319) underneath the second electret layer, a first conductor layer (311) on the
25 bottom surface of the first support layer and a second conductor layer (312) on the top surface of the second support layer, said first conductor layer being in contact with the first electret layer, and said second conductor layer being in contact with the second electret layer, an antenna feed conductor (320) being galvanically connected to the first and second conductor layer, the first audio conductor (341)
30 being connected to the first and second conductor layer and the second audio conductor (342) being connected to said conductive film (313).
- 35 4. An arrangement according to claim 3, **characterized** in that it also comprises a dielectric frame (370) around the radiator component (310) and between the radiator component and ground plane (GND) to prevent an acoustic short of the speaker and to support the radiator component.

5. An arrangement according to claim 3 and 4, **characterized** in that it also comprises a radio radiator (411) on the top surface of said radiator component.
6. An arrangement according to any of the preceding claim, **characterized** in that said electret layer is the EMFi type.
- 5 7. An arrangement according to claim 1, **characterized** in that the conductor planes of the radiator component that radiate radio waves are short-circuited at a certain point to the ground plane in order to form a PIFA type antenna.
- 10 8. A radio phone (MS) having a planar antenna with an antenna feed conductor and a speaker with two audio conductors, **characterized** in that it comprises a radiator component (510) that is arranged to function both as a radio wave radiator in the planar antenna and as a sound wave radiator in the speaker, and said antenna feed conductor and one of said audio conductors are galvanically connected to a same conductor plane in the radiator component.

1/4

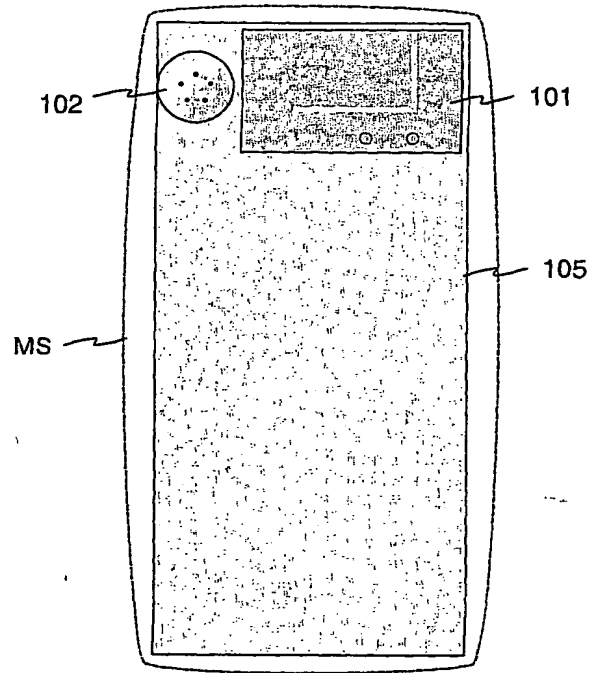


Fig. 1

PRIOR ART

BEST AVAILABLE COPY

2/4

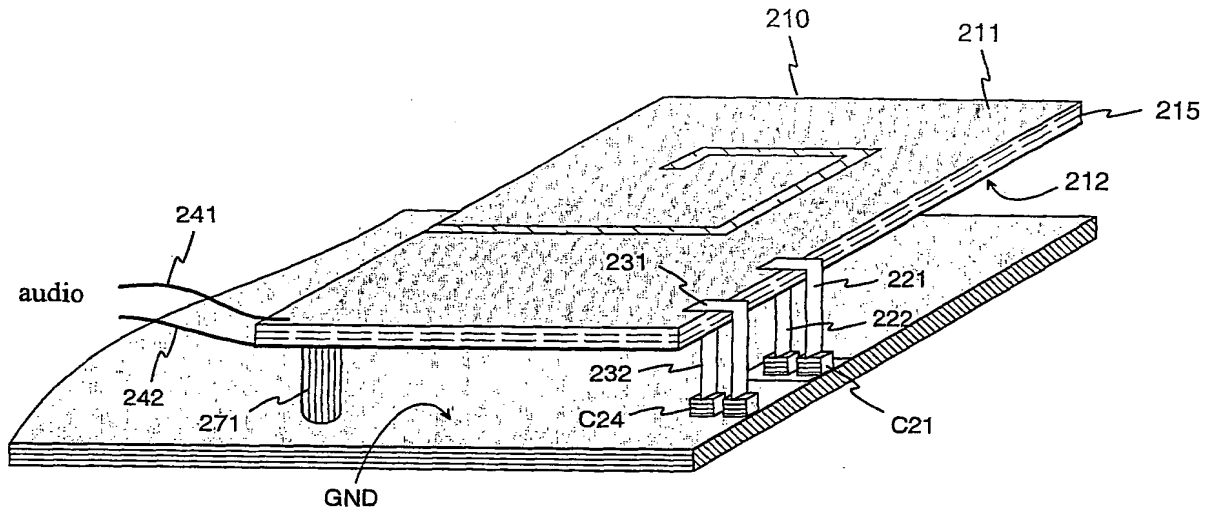


Fig. 2a

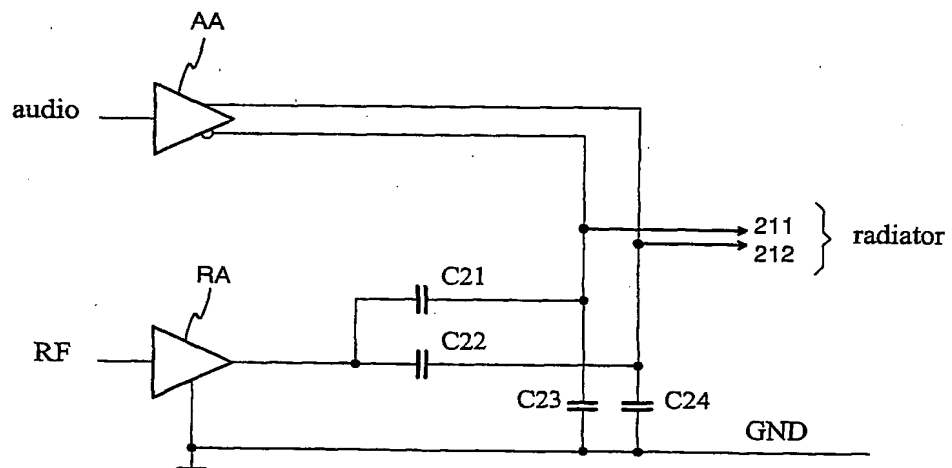


Fig. 2b

BEST AVAILABLE COPY

3/4

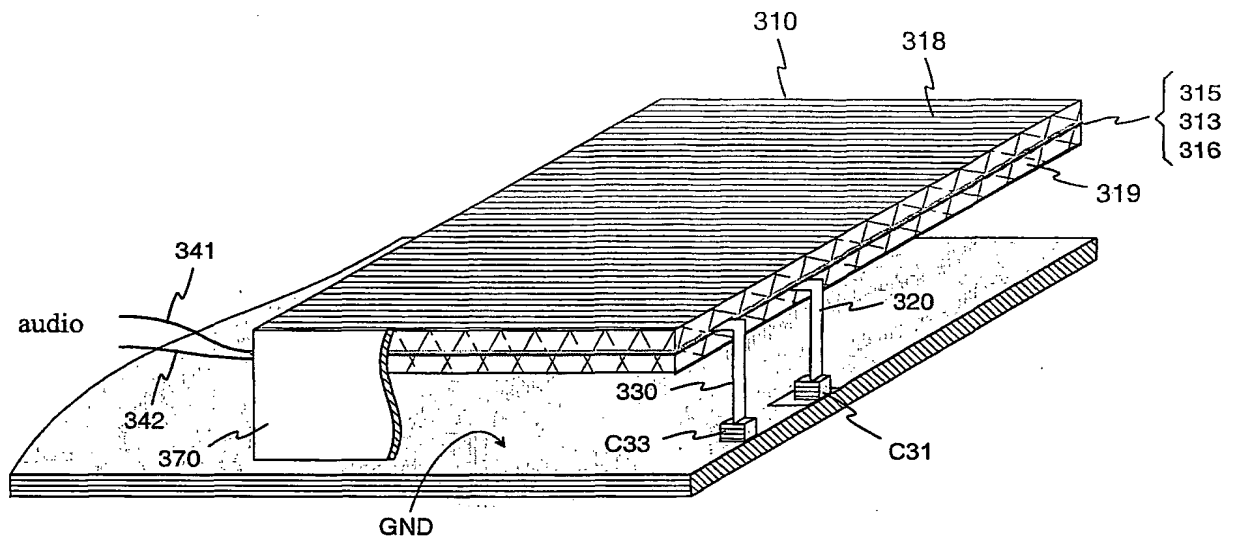


Fig. 3a

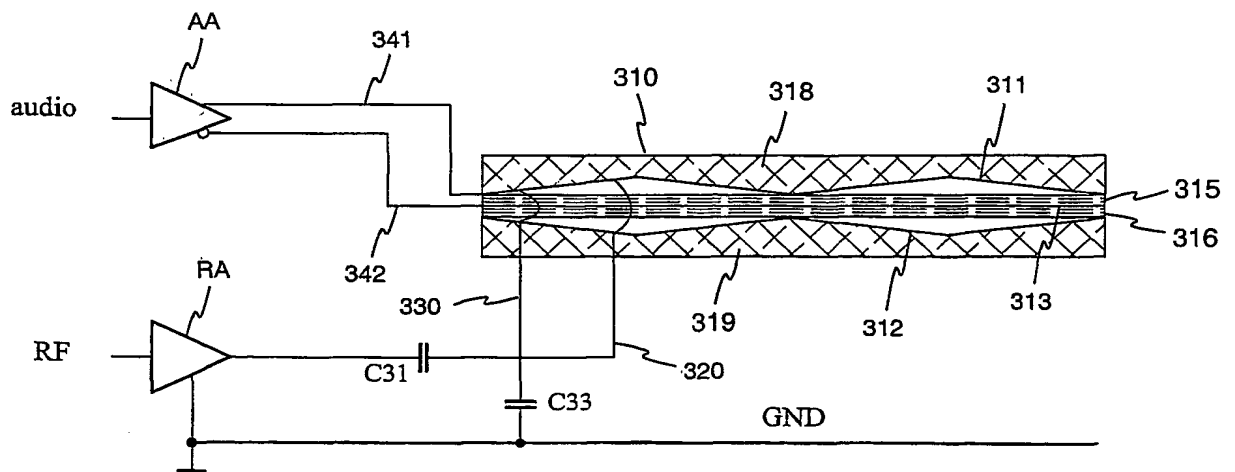


Fig. 3b

BEST AVAILABLE COPY

4/4

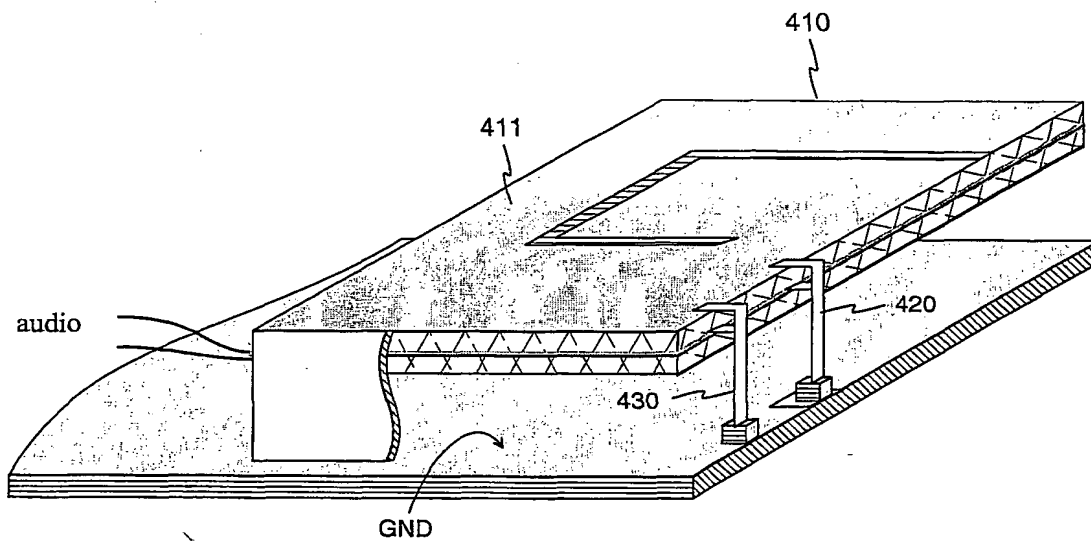


Fig. 4

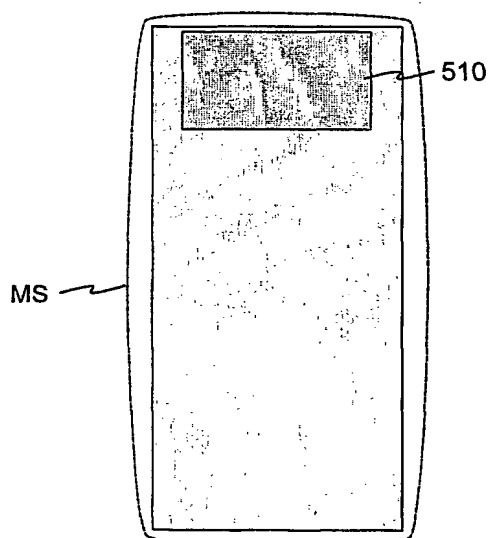


Fig. 5

BEST AVAILABLE COPY

INTERNATIONAL SEARCH REPORT

International application No.

PCT/FI 02/00566

A. CLASSIFICATION OF SUBJECT MATTER

IPC7: H01Q 1/24, H04M 1/02

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7: H01Q, H04M, H04R

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-INTERNAL, WPI DATA, PAJ, INSPEC

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 0038475 A2 (TELITAL R & D DENMARK A/S), 29 June 2000 (29.06.00), page 11, line 15 - page 13, line 20; page 15, line 9 - line 13, figures 1-2, abstract	1,6-8
A	--	4,5
X	WO 0030268 A1 (ERICSSON, INC.), 25 May 2000 (25.05.00), page 7, line 3 - line 34; page 8, line 1 - line 28, figures 2a-2c	1,6-8
E,X	WO 0250944 A1 (SIEMENS AKTENGESSELLSCHAFT), 27 June 2002 (27.06.02), page 4, line 1 - page 5, line 31; page 6, line 32 - page 7, line 21, figures 1-5, abstract	1,8
	--	

☒ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

30 Sept 2002

Date of mailing of the international search report

02-10-2002

Name and mailing address of the ISA/

Swedish Patent Office
Box 5055, S-102 42 STOCKHOLM
Facsimile No. +46 8 666 02 86

Authorized officer

Anna Malmberg /OGU
Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT

International application No.

PCT/FI 02/00566

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	GB 2079054 A (TOKYO SHIBAURA DENKI KK), 13 January 1982 (13.01.82), page 1, line 86 - line 114, figures 1-2, abstract --	2-3
P,A	DATABASE WPI Week 200163 Derwent Publications Ltd., London, GB; Class V06, AN 2001-562109 abstract & JP 2001 217633 A (NAKAMURA, T. ET AL) 10 August 2001 (2001-08-10) figures -- -----	1-8

Form PCT/ISA/210 (continuation of second sheet) (July 1998)

INTERNATIONAL SEARCH REPORT
Information on patent family members

02/09/02

International application No.
PCT/FI 02/00566

Patent document cited in search report			Publication date	Patent family member(s)		Publication date
WO	0038475	A2	29/06/00	AU	1773300 A	12/07/00
				CN	1331852 T	16/01/02
				DK	170098 A	22/06/00
				EP	1142059 A	10/10/01
WO	0030268	A1	25/05/00	AU	6039999 A	05/06/00
				CN	1326619 T	12/12/01
				DE	19983728 T	13/12/01
				US	6411826 B	25/06/02
WO	0250944	A1	27/06/02	DE	10063242 A	27/06/02
GB	2079054	A	13/01/82	DE	3125777 A	27/05/82
				JP	57014287 A	25/01/82
				US	4443711 A	17/04/84
				JP	57014297 A	25/01/82

THIS PAGE BLANK (USPTO)